




109 Independence Way  
 Coatesville, PA 19320  
 P: 610-857-2655  
 F: 610-857-2986  
 graphics@uticom.net  
 www.uticom.net

Part # U1014-AF-70E  
 U2200R Reflective Material

© Uticom Systems Inc. 2014  
 Proprietary and confidential information contained in this drawing is property of Uticom Systems Inc. and is only intended to be viewed by the end user or authorized distributor. Any reproduction in part or as a whole is strictly prohibited unless approved in writing by Uticom Systems, Inc.

Please review this drawing for accuracy. Approved by: \_\_\_\_\_ Date: \_\_\_\_\_

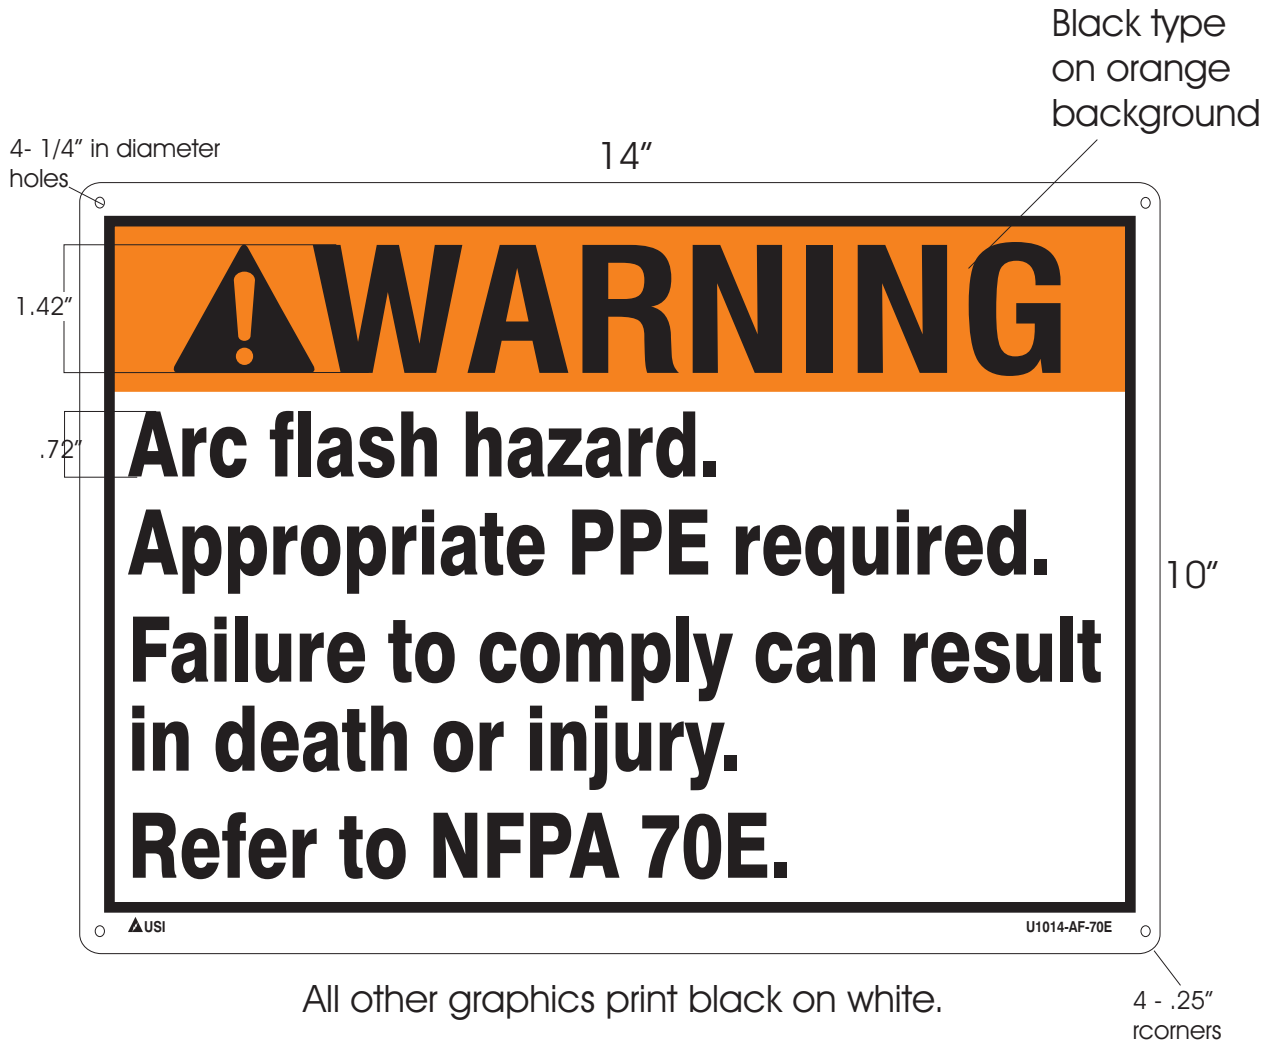

**U2200R Material:** 0.125" polycarbonate with reflective. Subsurface printed using automotive grade solvent based ink, thickness dry .0004" +/- .0001" with 30 micron emulsion, applied using a 158 mesh screen. Short term UV cured ink are not acceptable.

**Durability:** Minimum lifetime exterior durability of 20-25 years. Defective materials will be replaced at no charge. Minimum safe viewing distance is 21 feet per ANSI Z535.2-2011 Table B1. Recommended sign spacing 42-63 feet apart per NESC.